



Enriching lives through innovation

Technical Support Department
Adhesives Europe

Side-by-side report
Araldite[®] 2022-1
Araldite[®] F 362-1 / Hardener F 362-1

PREPARED BY

Laurent CHOUVET
HUNTSMAN ADVANCED MATERIALS
Klybeckstrasse 200
K 401. 5
4057 BASEL
Switzerland

Email: laurent_chouvet@huntsman.com

In order to always provide the best products to our customers and to ensure the sustainability of our structural adhesive range, we have developed the system Araldite® 2022-1 (in bulk Araldite® F 362-1 / Hardener F 362-1), which replaces Araldite® 2022. This new product enables:

- a new production process with **secured sources of raw materials**;
- the consolidation of our Methyl Methacrylate (MMA) adhesives production to **a dedicated plant in EU**;
- a simplification of our internal Supply-Chain **ensuring reliable deliveries** to our customers.

PRODUCT HIGHLIGHTS

Technical features

Feature	Benefit for the customer
Good Lap Shear Strength on a variety of substrates	Multipurpose, versatile/universal use
Improved elongation at break	Higher resistance at low temperature and higher resistance on composites
Toughness & Resilience	Resistant to vibrations & dynamic loading, impact resistance, assembly of dissimilar substrates
Medium Open time (> 20 min)	Allow to bond large parts, maintaining a short handling time (< 30 min)
Non sagging & gap filling	Easy processing, vertical application possible
Temperature resistance up to 100°C	Continuous operating temperature of end-part from very low temperatures to 100°C
Tolerant to non ideal surface preparation	Easy processing, increased productivity

Packaging


New cartridge type with special outlets avoiding cross contamination between resin and activator. This cartridge design prevents the cartridge to be blocked by cured adhesive residues after the first use.



TECHNICAL ASSESSMENT


Unless otherwise stated, the figures given below were all determined by testing standard specimens made by lap-jointing 114 x 25 x 1.5 mm strips of aluminium alloy. The joint area was 12.5 x 25 mm in each case. Cure condition was 16 hours at 40°C.

Lap Shear Strength at 23°C on different metal substrates (ISO 4587)

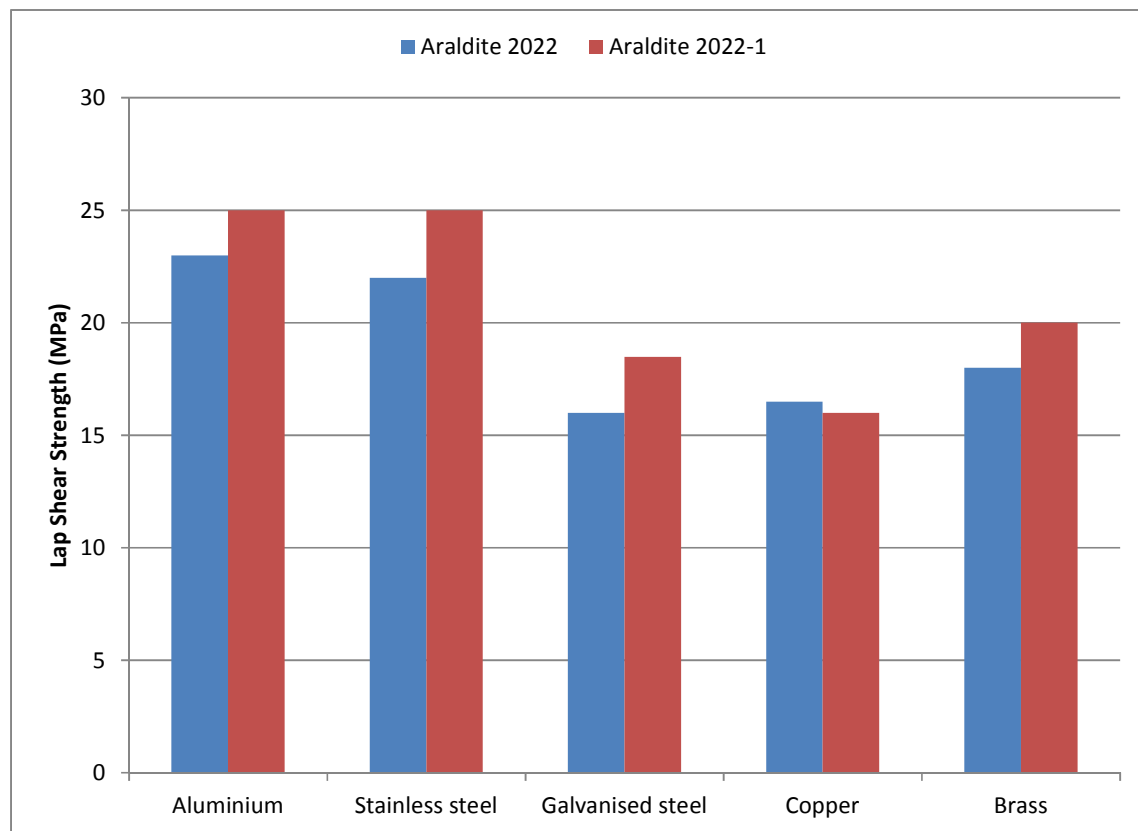


Substrates: sandblasted & degreased with acetone

Lap Shear Strength at 23°C on plastic substrates (ISO 4587)

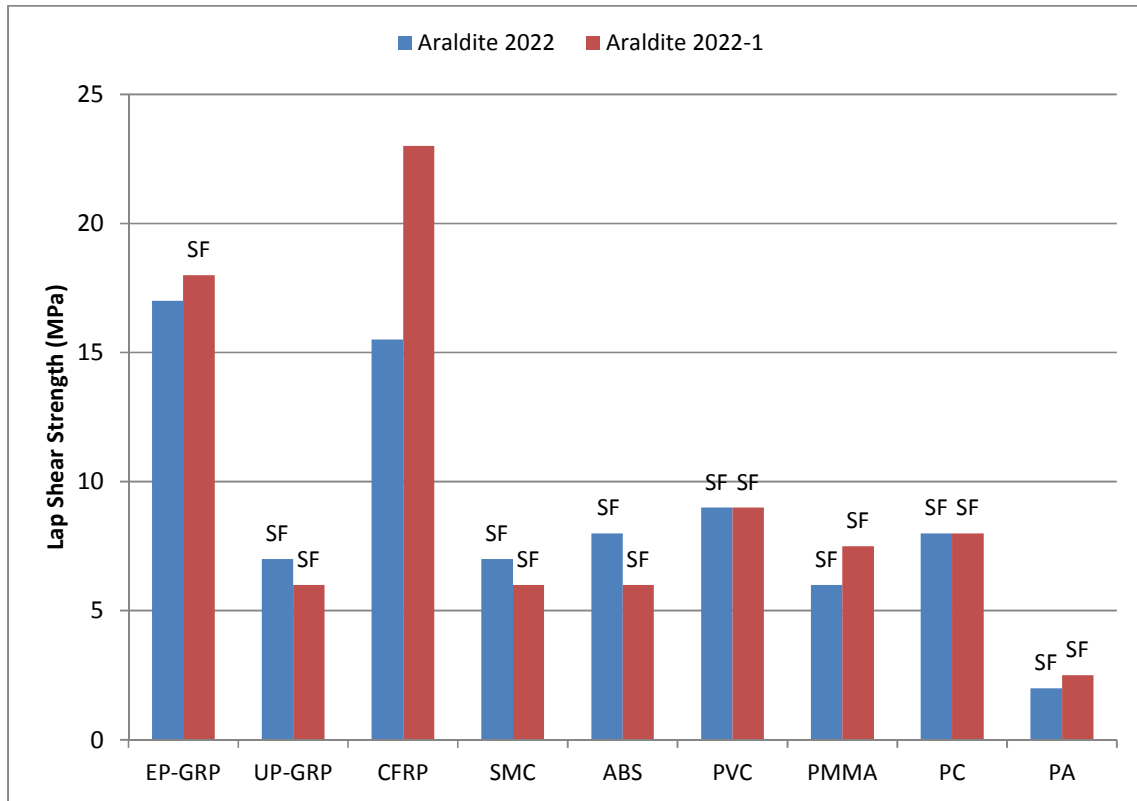

*Plastic substrates: abraded & degreased with isopropanol
SF: Substrate's failure*

Lap Shear Strength vs temperature (ISO 4587)

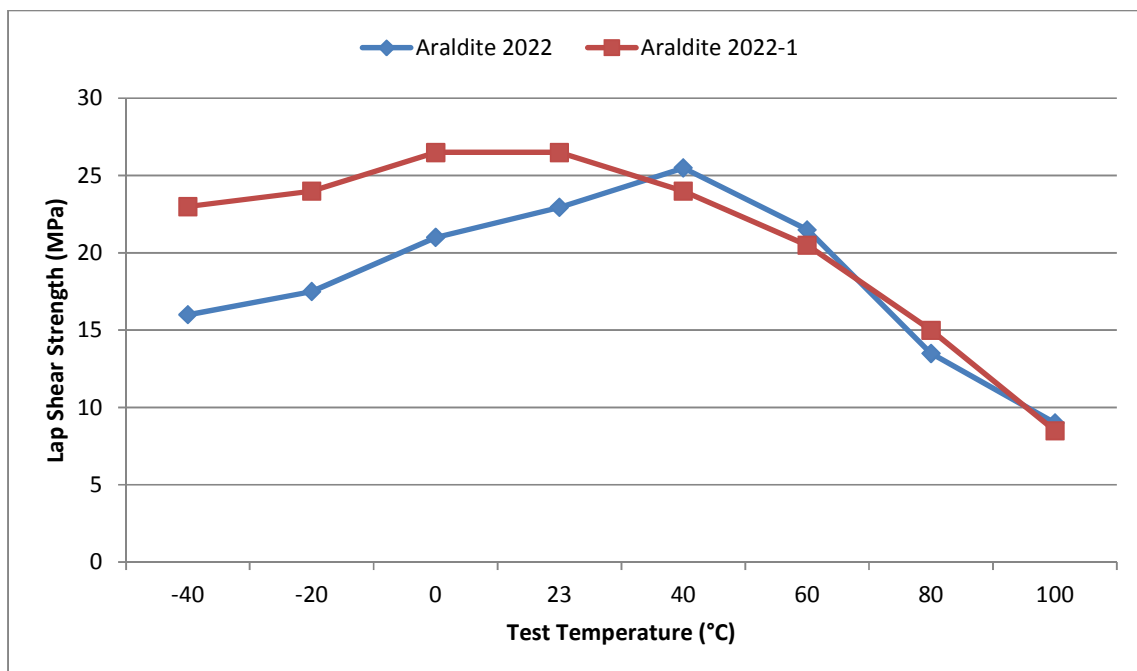

Tensile properties (ISO 527)

	Tensile modulus	Tensile strength	Elongation at break
Araldite® 2022	1900 MPa	39 MPa	3.6%
Araldite® 2022-1	1700 MPa	45 MPa	>5%

Chemical resistance – Lap Shear Strength on aluminium after immersion

	Araldite® 2022	Araldite® 2022-1
30 days in water at 60°C	> 10 MPa	> 10 MPa
30 days in water at 90°C		
30 days in lead free petrol at 23°C	> 15 MPa	> 15 MPa
30 days in IMS* at 23°C		
30 days in Xylene at 23°C	> 5 MPa	> 5 MPa
30 days in Acetic Acid at 23°C		

IMS*: Industrial Methylated Spirit.

Thermal aging:

Lap Shear Strength on aluminium after 30days heat aging at 70°C or 100 cycles - 30°C / 70°C

	Araldite® 2022	Araldite® 2022-1
30 days at 70°C	> 20 MPa	> 20 MPa
100 cycles (-30°C / 70°C)		

Reactivity: time to reach Lap Shear Strength of 1 & 10 MPa

	Araldite® 2022	Araldite® 2022-1
Time to reach 1 MPa at 23 °C	20 minutes	12 minutes
Time to reach 10 MPa at 23 °C	25 minutes	17 minutes

PACKAGING / REFERENCES**ADHESIVE**

	Reference	Content / Box
Araldite® 2022-1 50mL Cartridge	2718208	ARALDITE 2022-1 GB 6X6X50ML BL1
Araldite® 2022-1 380mL Cartridge	2718108	ARALDITE 2022-1 GB 6X380ML BL1
Araldite® F 362-1 Resin / Pail	3945808	ARALDITE F 362-1 GB 18KG Q4E
Hardener F 362-1 Hardener / Pail	3935108	HARDENER F 362-1 GB 18KG Q4E

DISPENSERS

	Reference	Designation
Manual gun for 50mL cart.	3933508	ARALDITE 2000 GUN 1:1 MMA 1 PAC 0 8 dispensers per pack
Additional Mixers for 50ML Cartridge	3959608	ARALDITE MIXER 1:1 MMA 50ML 50 PAC 00 50 mixers per pack
Manual gun for 380mL cart.	153267400	ARALDITE 2000 MAN GUN 400ML 1PCK 00
Pneumatic gun for 380mL cart.	153268500	ARALDITE 2000 AIR GUN 400ML 1PCK 00
Additional Mixers for 380 ML cartridge	3959708	ARALDITE MIXER 1:1 MMA 380ML 12 PAC 00 12 mixers per pack

CONCLUSION & RECOMMENDATIONS

Araldite® 2022-1 is directly equivalent to Araldite® 2022, in terms of performance and mechanical properties. However we recommend to our customers to check that the product is suitable for their specific application.



**Huntsman Advanced Materials
(Switzerland) GmbH**
Klybeckstrasse 200
CH - 4057 Basel
Switzerland

Tel: +41 (0)61 299 11 11
Fax: +41 (0)61 299 11 12

www.aralditeadhesives.com

Huntsman Advanced Materials warrants only that its products meet the specifications agreed with the user. Specified data are analysed on a regular basis. Data which is described in this document as 'typical' or 'guideline' is not analysed on a regular basis and is given for information purposes only. Data values are not guaranteed or warranted unless if specifically mentioned.

The manufacture of materials is the subject of granted patents and patent applications; freedom to operate patented processes is not implied by this publication. While all the information and recommendations in this publication are, to the best of Huntsman Advanced Material's knowledge, information and belief, accurate at the date of publication, nothing herein is to be construed as a warranty, whether express or implied, including but without limitation, as to merchantability or fitness for a particular purpose. In all cases, it is the responsibility of the user to determine the applicability of such information and recommendations and the suitability of any product for its own particular purpose.

The behaviour of the products referred to in this publication in manufacturing processes and their suitability in any given end-use environment are dependent upon various conditions such as chemical compatibility, temperature, and other variables, which are not known to Huntsman Advanced Materials. It is the responsibility of the user to evaluate the manufacturing circumstances and the final product under actual end-use requirements and to adequately advise and warn purchasers and users thereof.

Products may be toxic and require special precautions in handling. The user should obtain Safety Data Sheets from Huntsman Advanced Materials containing detailed information on toxicity, together with proper shipping, handling and storage procedures, and should comply with all applicable safety and environmental standards.

Hazards, toxicity and behaviour of the products may differ when used with other materials and are dependent on manufacturing circumstances or other processes. Such hazards, toxicity and behaviour should be determined by the user and made known to handlers, processors and end users.

Except where explicitly agreed otherwise, the sale of products referred to in this publication is subject to the general terms and conditions of sale of Huntsman Advanced Materials LLC or of its affiliated companies including without limitation, Huntsman Advanced Materials (Europe) BVBA, Huntsman Advanced Materials Americas Inc., Huntsman Advanced Materials (UAE) FZE, Huntsman Advanced Materials (Guangdong) Company Limited, and Huntsman Advanced Materials (Hong Kong) Ltd.

Huntsman Advanced Materials is an international business unit of Huntsman Corporation. Huntsman Advanced Materials trades through Huntsman affiliated companies in different countries including but not limited to Huntsman Advanced Materials LLC in the USA and Huntsman Advanced Materials (Europe) BVBA in Europe.

All trademarks mentioned are either property of or licensed to Huntsman Corporation or an affiliate thereof in one or more, but not all, countries.

Copyright © 2016 Huntsman Corporation or an affiliate thereof. All rights reserved.